## (19) World Intellectual Property Organization

International Bureau



## 

(43) International Publication Date 15 September 2005 (15.09.2005)

**PCT** 

## (10) International Publication Number WO 2005/084780 A1

(51) International Patent Classification7: H01M 8/04, F02C 7/052

B01D 45/16,

(21) International Application Number:

PCT/EP2005/002432

(22) International Filing Date: 8 March 2005 (08.03.2005)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 10 2004 011 176.6 8 March 2004 (08.03.2004) DR 10 2004 011 177.4 8 March 2004 (08.03.2004) DE 10 2004 037 157.1 30 July 2004 (30.07.2004) DE

60/593,019

30 July 2004 (30.07.2004) US


- (71) Applicant (for all designated States except US): REINZ-DICHTUNGS-GMBH [DE/DE]; Reinzstrasse 3-7, 89233 Neu-Ulm (DE).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): WAGNER, Jürgen [DE/DE]; Gartenweg 48, 89176 Asselfingen (DE). GRAFL, Dieter [DE/DE]; Maienweg 164, 89081 Ulm

(DE). PRASKA, Armin [DE/DE]; Kettelerstrasse 60, 97222 Rimpar (DE). LEMKE, Kal-Uwe [DE/DE]; Heckenbühl 46, 89075 Ulm (DE).

- (74) Agent: PFENNING, MEINIG & PARTNER GbR: Mozartstrasse 17, 80336 München (DE).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM. ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: A FLUID SEPARATION DEVICE

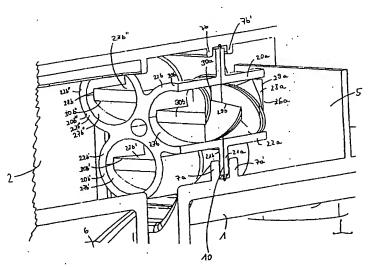

(57) Abstract: The present invention relates to a fluid separation device (10) for separating fluid, oil and oil spray from a gas. This fluid separation device (10) comprises a base carrier (21) in which fluid separator elements (20) in the form of flow-through tubes with worm-like segments (23) arranged therein, are integrated. The worm-like segments (23) at the same time form spiral flow paths (25) for the gas. They have a maximal length of half a pitch of the worm-like segment (23) so that the base carrier (21) together with the associated fluid separator elements (20) may be formed as one piece. Several base carriers may be arranged one after the other in a manner such that individual fluid separator elements of various base carriers form a common flow path for the gas.